

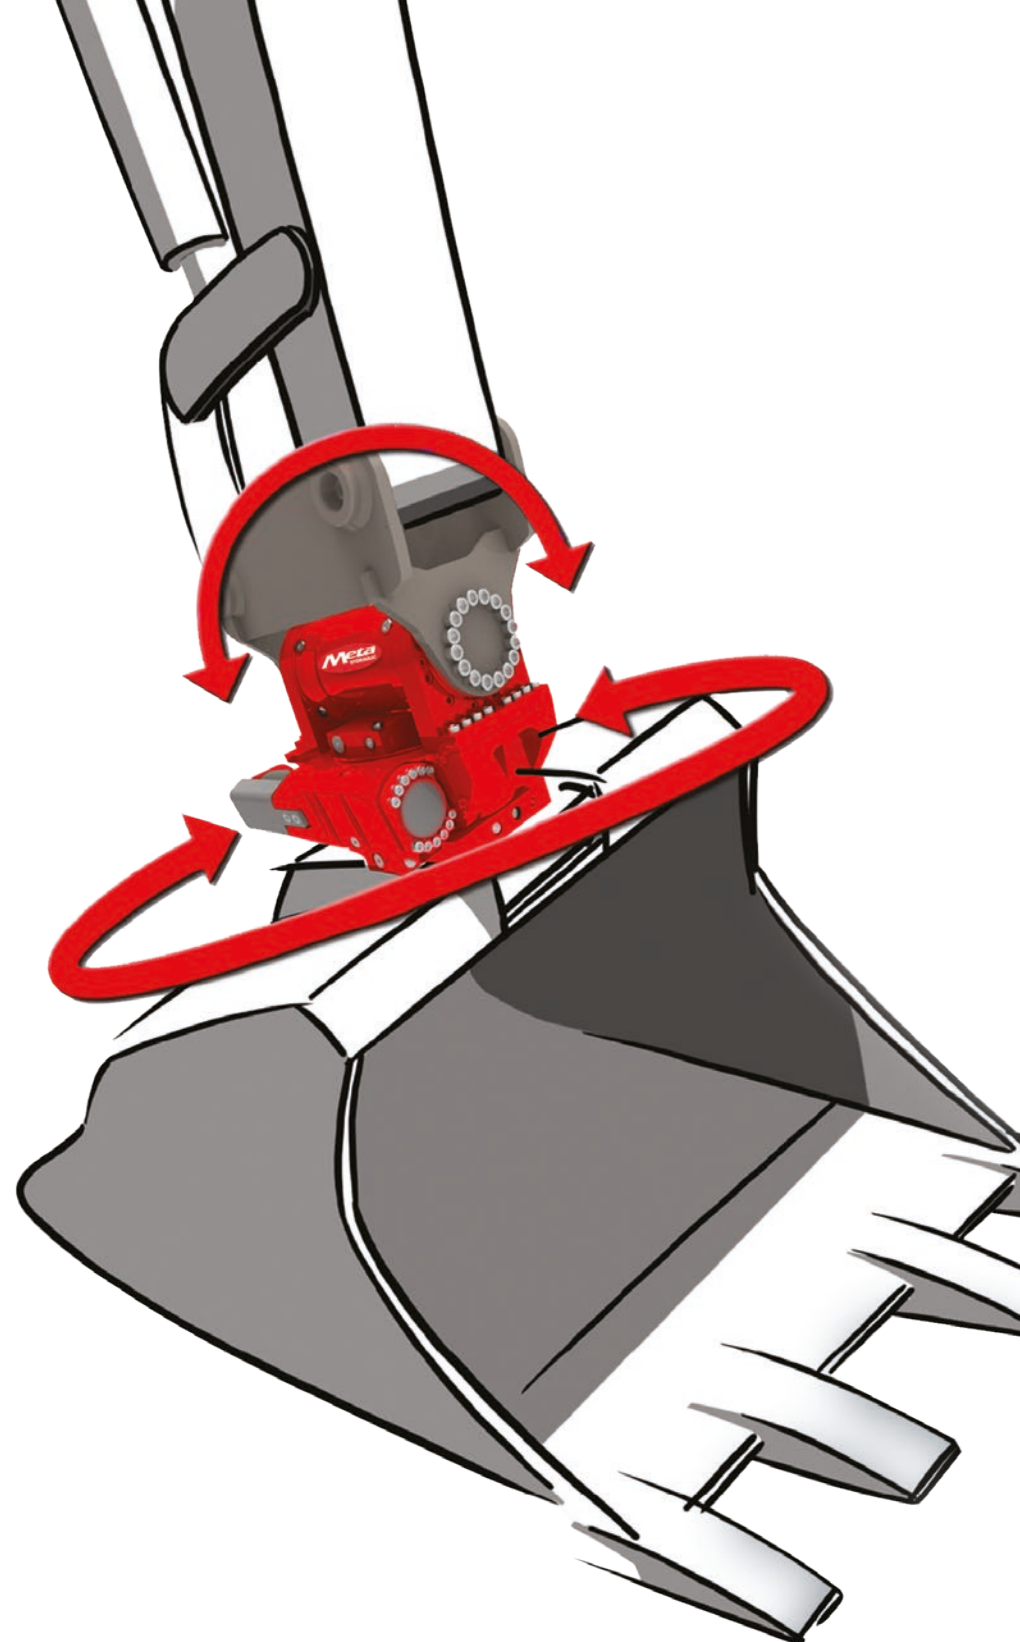


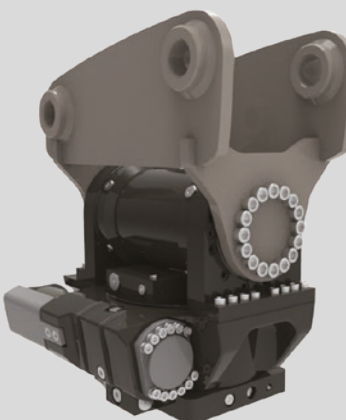

www.metahydraulic.com

Ro-thor RT80

seguici su:

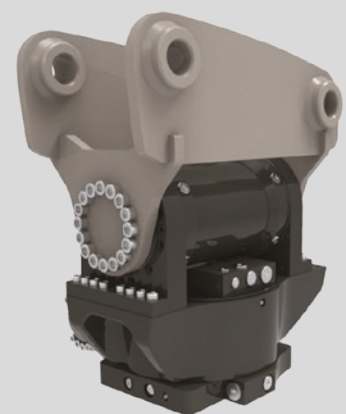

Via Diogene 3 - 42048 Rubiera (RE) - Italy
t. +39 0522 62 12 28 - f. +39 0522 26 22 10
info@metahydraulic.com
www.metahydraulic.com



Ro-thor RT 80

L'innovativo giunto rotante posizionato
tra la benna e il braccio meccanico

*The innovative rotating joint positioned
between the bucket and the mechanical arm*





Ro-thor RT 80 è uno degli ultimi prodotti realizzati da Meta, ed è destinato ad assorbire una quota sempre maggiore dell'attività aziendale.

Si tratta di un **giunto rotante** installato nel **punto di collegamento** tra la **benna** e il **braccio meccanico** di una macchina movimento terra; consente di **rendere molto più dinamico** l'utilizzo del mezzo, che oltre a spostare il materiale per lo svuotamento-riempimento del terreno, è anche nelle condizioni di effettuare **spostamenti laterali, destra-sinistra**, e di **rotazione su se stesso**.

Ro-thor RT 80 is one of Meta's latest products and is designed to absorb a growing share of the business.

*This is a **rotary joint** installed at the **point of connection** between the **bucket** and the **mechanical arm** of a landing machine; makes it possible to make **the use of the vehicle much more dynamic** than, in addition to moving the soil emptying and filling material, it is also in the conditions of **lateral displacement, right-left** and **rotating on itself**.*

Modello RT 80


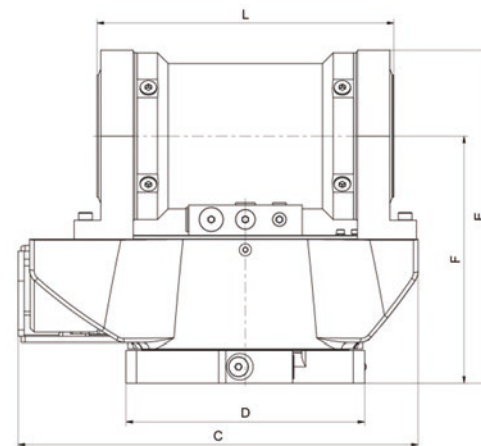
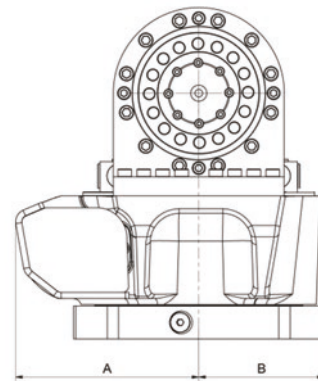


Dimensioni Ro-thor RT 80

Dimensioni Ro-thor RT 80

A(mm) 241 E(mm) 435.5
B(mm) 165 F(mm) 323
C(mm) 528 L(mm) 392
D(mm) 315

Modello TX 80

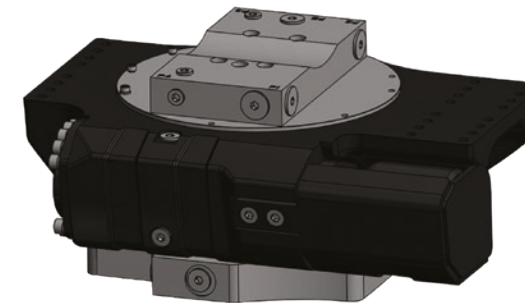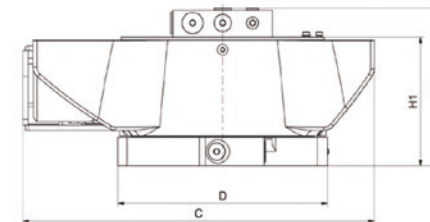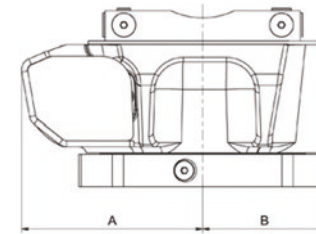

Dimensioni TX 80

Dimensioni TX 80

A(mm) 241 D(mm) 315
B(mm) 165 H1(mm) 193
C(mm) 528 H2(mm) 236

Performance TX 80

Performance TX 80

Slewing left/right **360°**
Max. axial load [N] **152.000**
Max. radial load [N] **132.000**
Working pressure [bar] **175**
Torque [Nm] **2.860**
RPM with l/min at max. 175 bar **8-35**
Weight (rotary joint included) [kg] **150**

Modello TL 80



Performance TL 80

Performance TL 80

Tilt angle **2x 55°**
Tilt angle on demand **2x 70°**
Oil volume [litres] **1,20**
Working pressure [bar] **210**
Torque at 210 bar [Nm] **8.000**
Holding torque at 210 bar [Nm] **18.000**
Weight [kg] **90**

Massimizziamo la vostra efficienza

Ro-thor RT 80 è un prodotto che l'ufficio progettazione Meta ha studiato **sulla base di precise indicazioni fornite dai clienti finali** del settore, i quali chiedono macchine movimento terra **altamente performanti e versatili**, in grado di svolgere attività **sempre più variegate**.

We maximize your efficiency

*Ro-thor RT 80 is a product designed by Meta's design office **based on precise indications provided by end-customers in the industry**, who are demanding **high-performance, versatile excavator machines** that are able to carry out **more and more diverse activities**.*

www.metahydraulic.com